

THOMPSON 3200 MIXER/GRINDER

Features:

- Seamless, fully welded, solid stainless steel construction
- Automatic forward/reverse mixing action
- Solid stainless steel feedscrew, mixing paddle, and grinding head
- 12.5-hp grinding motor
- Handles meat temperatures as low as 24°F
- Stainless steel counterbalanced interlocking lid with inspection viewing slots allows for addition of spices or ingredients while mixing.
- Mixing action stops when safety lock on lid is released
- Dual Independent helical gear drives for mixing and grinding
- Heavy duty locking casters
- Auto reversing screw
- Elevating stand
- Foot pedal lid closing device

Options:

- Connections for tandem (Gemini) production
- Bone removal system
- Ingredients chute
- Column hoist and lid sensor interlock




PRODUCT SPECIFICATIONS

Production capacity	Up to 6,613-lbs (3,000kg) per hour depending on plate size and 66-lbs. (30kg) per minute (regrind through 1/8" plate)
Hopper volume	300 liters
Mixing capacity	440-lbs. (200kg)
Grinding head size	52 (5 1/8")
Gear motor (grinding)	12.5-hp
Gear motor (mixing)	3-hp
Electrical	230 volt, 60Hz, 3-phase

MACHINE DIMENSIONS

A	4.2-ft. (1,266mm)
B	3.9-ft. (1,203mm)
C	5.5-ft. (1,678mm)
D	8.4-ft. (2,565mm)
E	2.5-ft. (751mm)
F	3-ft. (900mm)
G	8.6-in. (218mm)

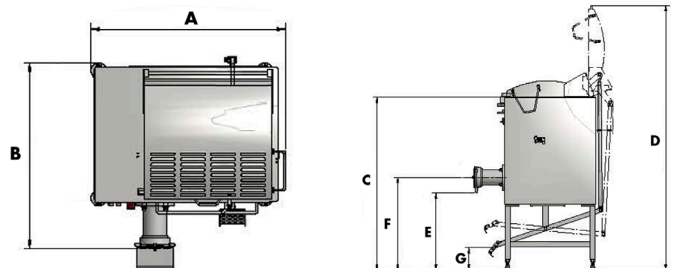

Contact us at:

UltraSource LLC
1414 West 29th Street
Kansas City, MO 64108-3604 USA

888-997-6824

P: 816-753-2150

F: 816-753-4976

info@UltraSourceUSA.com

UltraSourceUSA.com



UltraSource®