


# ULTRAVAC 500

## SINGLE CHAMBER VACUUM PACKAGING MACHINE

### Double Your Package Throughput

**The Ultravac® 500 is equipped with two seal bars and one large capacity chamber, in a single machine**

The Ultravac 500 more than doubles the packaging production of tabletop vacuum packaging machines. Two 18" seal bars, one located on either side of the chamber, provide 36" of usable sealing bar length. If you are cramped for floor space but need more package throughput, the Ultravac 500 is the solution for you.

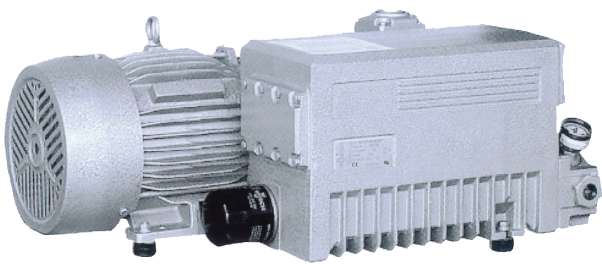

**The heavy duty and rugged, 2-hp Busch® vacuum pump powers the Ultravac 500 for years of dependable service**



# ULTRAVAC 500

## SINGLE CHAMBER VACUUM PACKAGING MACHINE

### Standard Features:

- » Two year warranty
- » 2-hp vacuum pump
- » 12 gauge stainless steel construction
- » Patented lid hinge system minimizes stress on lid to eliminate cracking
- » Digital control panel
  - » Ten savable programs
  - » Operator/supervisor menu
  - » Multiple vac/gas cycles
  - » Vacuum sensing control
  - » Quick stop
  - » Pulse vac/vent
- » Heavy duty, transparent, molded acrylic lid
- » Hot wire cutoff
- » Electrical connection 230 volt, 3-phase with other voltages available
- » Heavy duty seal transformer (750VA)
- » High density polyethylene filler boards
- » NEMA 4 washdown modular controls
- » Two seal bars
- » Locking casters



### Optional Features:

- » Gas flush operation
- » Double seam sealing
- » Slant tray for liquids
- » Inline filter kit
- » Single phase electrical connection

#### Product Specifications

A. Length	28.25-in.
B. Width	24-in.
C. Maximum Height	52.5-in.
D. Working Height	35.125-in.
E. Seal Bar Length	Two at 18-in.
F. Chamber Length	25.5-in.
G. Chamber Width	19.25-in.
H. Chamber Depth	9-in.
Between Seal Bar and Back of Chamber	21.125-in.
Vacuum Pump	2-hp
Net Weight	353-lbs.
Electrical Connection	230V/10amp/60Hz (3-phase) 230V/13.5amp/60Hz (1-phase) 380V/6.3amp/50Hz (3-phase)