

# ULTRAVAC® 800

## DOUBLE CHAMBER VACUUM PACKAGING MACHINE

**This double chamber vacuum packaging machine has no options...it has everything you'd ever need built in. And, it's assembled in the USA, Kansas City, MO!**



### Contact us at:

UltraSource LLC  
1414 West 29th Street  
Kansas City, MO 64108-3604 USA

**800.777.5624**

Telephone: 816.753.2150  
Fax: 816.753.4976  
info@UltraSourceUSA.com  
UltraSourceUSA.com



**UltraSource®**

© Copyright 2014 UltraSource LLC

**Think UltraSource First.**

Our new Ultravac® 800 double chamber vacuum packaging machine has been designed for economical, single operator efficiency in a daily use environment where operational simplicity and mid range production speeds are required. The machine's 10" chamber depth enables operators to handle a wide variety of products from individual steaks and chops to primal cuts.


**Assembled by UltraSource in the USA** and designed to withstand cold, wet, and harsh environments for many years, our new Ultravac 800 machine features stainless steel construction in all major components; four sealing stations with two 31.5" long seal bars in each chamber, which produce 10mm wide band seals to minimize "leakers" and rework; a flat deck design for ease of sanitation; and a NEMA 4 digital control panel that stores up to 10 programs for a variety of products, assuring consistency from cycle to cycle.

# ULTRAVAC® 800

## DOUBLE CHAMBER VACUUM PACKAGING MACHINE

### All Standard Features

- Stainless steel construction
- Two 31.5" long seal bars in each chamber
- 10mm wide band seals
- 10" chamber depth
- NEMA 4 digital control panel
- Vacuum sensor
- High density plastic filler plates
- Air assisted sealing capable
- Easy access panel doors for easier maintenance
- Locking, heavy duty casters
- Assembled in the USA
- One year warranty

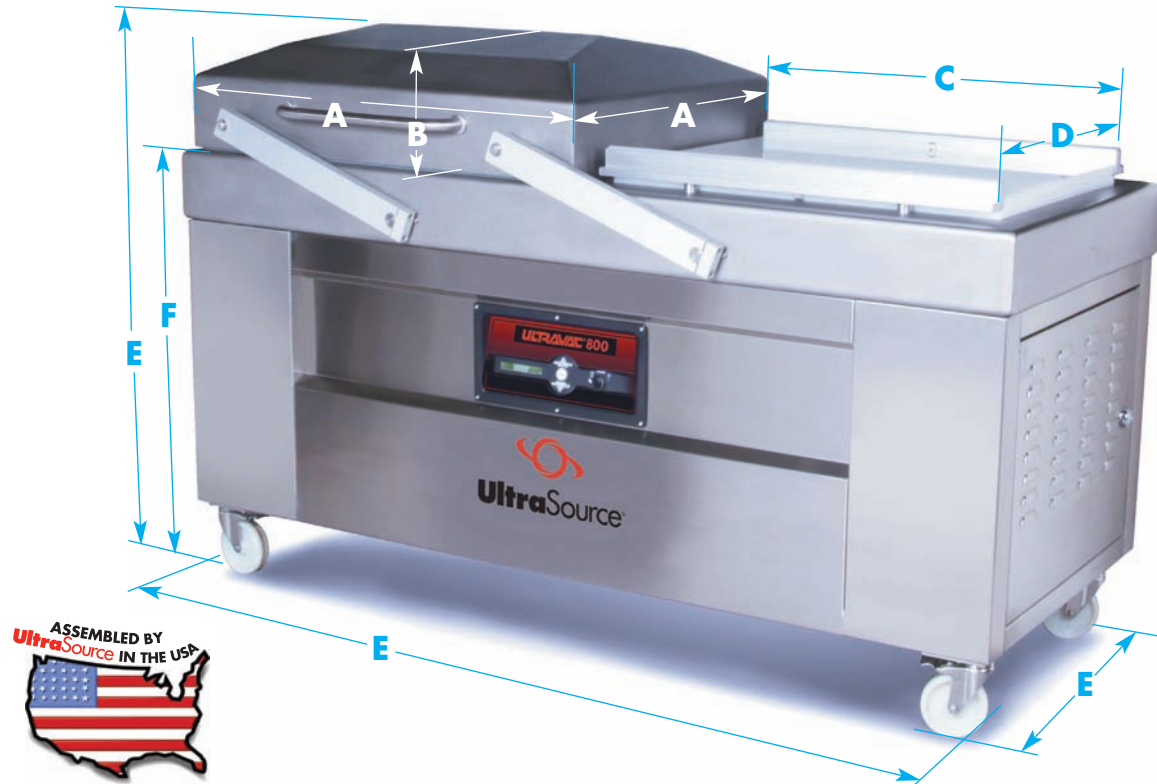

### Technical Specifications

A	Chamber Dimensions	29.5" x 37.4" (750mm x 950mm)		
B	Chamber Height	10" (254mm)		
C	Seal Bar Length	2 x 31.5" (800mm) each chamber		
D	Distance Between Seal Bars	24" (610mm)		
E	Outside Dimensions	74.8"L x 37.6"W x 47.2"H (1,899mm x 955mm x 1,200mm)		
F	Working Height	37.2" (945mm)		
	Vacuum Pump	5-hp (63 c.f.m)	or	10-hp (180 c.f.m)
	Electrical / Amperage	230V / 60Hz / 3-phase 13 amp (5-hp pump)	or	26 amp (10-hp pump)
	Cycle Times	5-hp: 38 seconds per cycle	or	10-hp: 24 seconds per cycle
	Net Weight	5-hp: 1,128 lbs.	or	10-hp: 1,330 lbs.

Since 1883, companies large and small have been looking to UltraSource for innovative solutions for their processing, packaging, and labeling equipment needs. Call one of our equipment specialists today, or visit our web site at [UltraSourceUSA.com](http://UltraSourceUSA.com) and let us help your company.